

A.M.A. STRAWBERRY GROWING SYSTEM



A professional grade,
do-it-yourself strawberry
production system for
small scale strawberry
producers looking to
expand their business
or extend their season.

amahort.com



Gutter Specifications

Scope of project:

- gutters x m¹ = m¹



Gutter specifications:

GT03-110-360

Closed gutter, width 130mm, height 105mm, steel thickness 0.6mm

Maximum load on gutters is 25kg per linear meter, with a maximum span of 3 meters

Coating for gutter double sided 35 mu of PE / 35 mu of PE

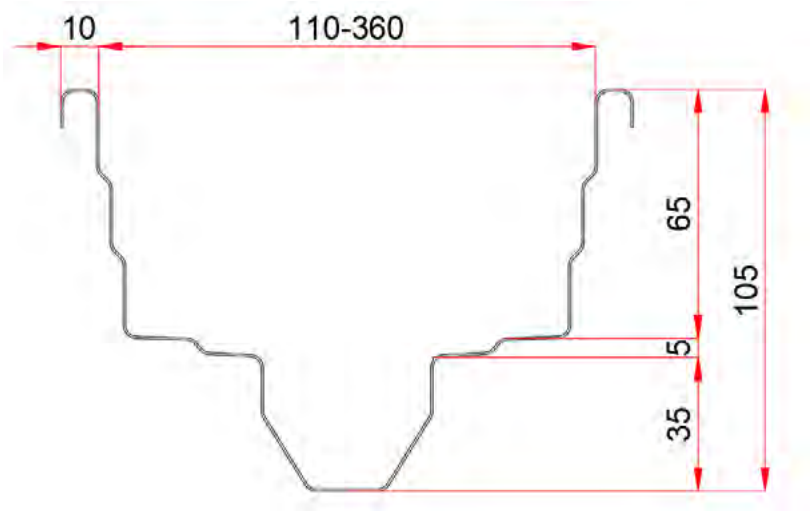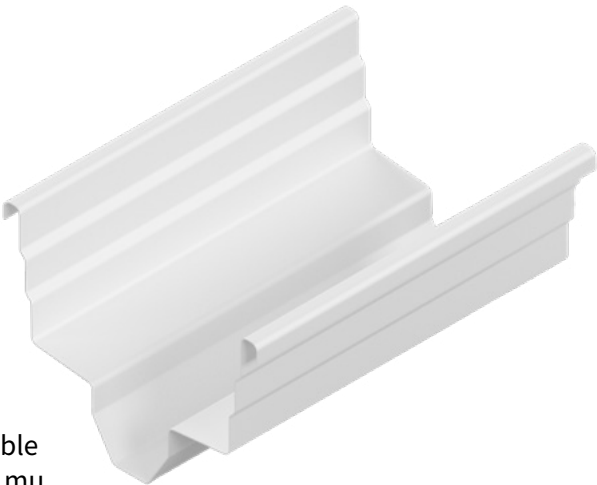

Suspension

To suspend the gutters a post bracket is provided for every 2 meters:

- gutters x post points = gutter brackets

Each post consists out of:

- Gutter support bracket 8mm Galvanized wire
- * Pipe to be supplied by customer



Gutter accessories and options

Drain trays & end caps

For each gutter we supply:

- One stainless steel drain tray with 1 meter of drain hose and mounting materials
- One powder coated steel end cap



Irrigation brackets

To hold the irrigation tubing on the side of the gutter an irrigation bracket made from Ø4mm galvanized wire is supplied for every 600mm that can be clamped around the gutter.



Truss tape brackets pathway and gable

For each gutter a truss tape bracket made from Ø10mm galvanized wire is supplied for both the pathway and gable to support the truss tape.



Inter brackets

An inter bracket made of Ø6mm galvanized wire is supplied every 2 meters. This bracket is clamped around the gutter and supports the truss tape.



Truss tape & Leaf wire

Truss tape included for both sides of the cultivation gutters to support flower trusses. The truss tape is supplied in rolls of 100m.



Irrigation system

Irrigation hose

For each row we deliver a co-extruded hose with a diameter of [redacted] mm. The hose is layered with white polyethylene on the outside and inside, with a layer of black polyethylene in between.

[redacted] m¹ x Ø 25 x 21,2mm white/black tubing PN4
[redacted] rows of [redacted] m punched every [redacted] cm ([redacted]/row)

Dripper & dripper assemblies

All drippers used are Rivulis Supertif PC/PCND or netafim with white PE microtubing and a black barb or snakeg attached.

The complete assembly will be delivered, in the exact length per row, to the project location.



- [redacted] x Assembled dripper set: dripper [redacted] L, microtube 75cm white/black and black BARB peg
- [redacted] x PE compression coupling 25mm x 3/4" male
- [redacted] x PE compression elbow coupling 25 x 25mm
- [redacted] x PP barbed valve 25 x 25mm

Ready to get started with the A.M.A. Strawberry Growing System?

Contact us for information, advice
or a custom quote.

519-322-1397 | 800-338-1136
ama@amahort.com
amahort.com | @amahort

We have what you need to succeed.

A.M.A. Horticulture is a dynamic, solutions-focused supplier serving the horticulture industry since 1982. We don't start with the products, we start with your growing goals and challenges and then work with you to find the best solution. Our experienced team understands what it's like on your side of the fence and speaks your language. We believe in strong partnerships, learning and innovation, and great customer service.

Our mission is to help you find solutions for your success.

Check out our other horticulture solutions at
www.amahort.com and contact our team to get started.

